


Equilibradores - CP9911 a CP9950



- Equilibradores para carga ligeras 0.4 a 3 kg
- Cable de acero inoxidable
- Carcasa de aluminio
- Carrera de cable 1,600 mm



Max.
3 kg (6.6 lbs)




MODELO	REFERENCIA	CAPACIDAD DE CARGA		RECORRIDO DEL CABLE		PESO	
		kg	lb.	mm	ft	kg	lb.
CP9911	894 109 9110	0.4-1.0	0.8-2.2	1,600	5.2	0.6	1.3
CP9912	894 109 9120	1.0-2.0	2.2-4.4	1,600	5.2	0.6	1.3
CP9913	894 109 9130	2.0-3.0	4.4-6.6	1,600	5.2	0.7	1.5



- Equilibradores para carga ligeras 1 a 8 kg
- Cable de acero inoxidable
- Carcasa de aluminio
- Carrera de cable 2,000 mm



Max.
8 kg (17.6 lbs)

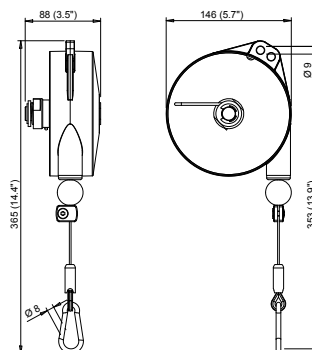


MODELO	REFERENCIA	CAPACIDAD DE CARGA		RECORRIDO DEL CABLE		PESO	
		kg	lb.	mm	ft	kg	lb.
CP9920	894 109 9200	1.0-2.5	2.2-5.5	2,000	6.5	2.0	4.4
CP9921	894 109 9210	2.0-4.0	4.4-8.8	2,000	6.5	2.0	4.4
CP9922	894 109 9220	4.0-6.0	8.8-13.2	2,000	6.5	2.3	5.1
CP9923	894 109 9230	6.0-8.0	13.2-17.6	2,000	6.5	2.5	5.5



- Equilibradores para carga ligeras 2 a 14 kg
- Cable de acero inoxidable
- Carcasa de aluminio
- *Equipado con dispositivo de bloqueo
- Carrera de cable 2,500 mm



Max.
14 kg (30.8 lbs)

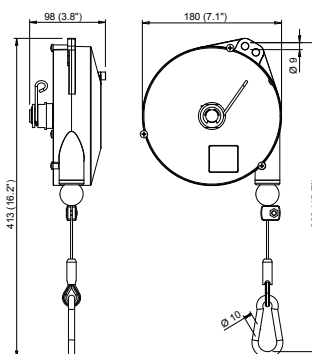

MODELO	REFERENCIA	CAPACIDAD DE CARGA		RECORRIDO DEL CABLE		PESO	
		kg	lb.	mm	ft	kg	lb.
CP9936	894 109 9360	2.0-4.0	4.4-8.8	2,500	8.2	2.9	6.4
CP9937	894 109 9370	4.0-6.0	8.8-13.2	2,500	8.2	3.2	7.1
CP9938	894 109 9380	6.0-8.0	13.2-17.6	2,500	8.2	3.5	7.7
CP9939	894 109 9390	8.0-10.0	17.6-22.0	2,500	8.2	3.7	8.2
CP9940	894 109 9400	10.0-14.0	22.0-30.8	2,500	8.2	4.0	8.8
CP9946*	894 109 9460	2.0-4.0	4.4-8.8	2,500	8.2	3.0	6.6
CP9947*	894 109 9470	4.0-6.0	8.8-13.2	2,500	8.2	3.3	7.3
CP9948*	894 109 9480	6.0-8.0	13.2-17.6	2,500	8.2	3.6	7.9
CP9949*	894 109 9490	8.0-10.0	17.6-22.0	2,500	8.2	3.8	8.4
CP9950*	894 109 9500	10.0-14.0	22.0-30.8	2,500	8.2	4.0	8.8