


Equilibradores - CP9954 a CP9971




- Equilibradores para cargas semipesadas 4 a 25 kg
- Freno de fricción opcional
- Cable de acero inoxidable
- Carcasa de aluminio
- Carrera de cable 2,000 mm

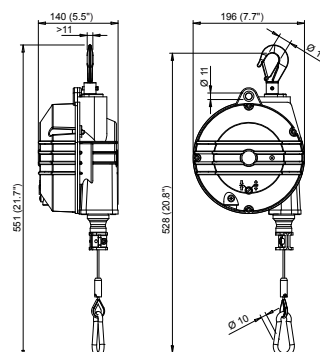

MODELO	REFERENCIA	CAPACIDAD DE CARGA		RECORRIDO DEL CABLE		PESO	
		kg	lb.	mm	ft	kg	lb.
CP9954	894 109 9540	4.0-7.0	8.8-15.4	2,000	6.5	5.0	11.0
CP9955	894 109 9550	7.0-10.0	15.4-22.0	2,000	6.5	5.5	12.1
CP9956	894 109 9560	10.0-14.0	22.0-30.9	2,000	6.5	5.5	12.1
CP9957	894 109 9570	14.0-18.0	30.9-39.7	2,000	6.5	6.5	14.3
CP9958	894 109 9580	18.0-22.0	39.7-48.5	2,000	6.5	6.0	13.2
CP9959	894 109 9590	22.0-25.0	48.5-55.1	2,000	6.5	6.6	14.6




- Equilibradores para cargas pesadas 25 a 75 kg
- Cable de acero inoxidable
- Carcasa de aluminio
- Carrera de cable 2,000 mm

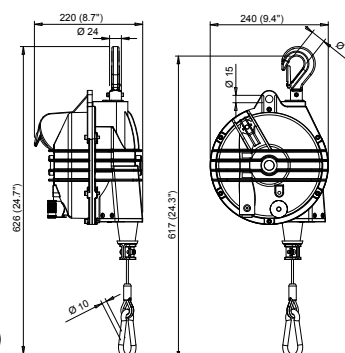

MODELO	REFERENCIA	CAPACIDAD DE CARGA		RECORRIDO DEL CABLE		PESO	
		kg	lb.	mm	ft	kg	lb.
CP9964	894 109 9640	25-30	55-66	2,000	6.5	11.5	25.4
CP9965	894 109 9650	30-35	66-77	2,000	6.5	11.8	26.0
CP9966	894 109 9660	35-45	77-99	2,000	6.5	12.4	27.3
CP9967	894 109 9670	45-55	99-121	2,000	6.5	12.5	27.6
CP9968	894 109 9680	55-65	121-143	2,000	6.5	13.6	30.0
CP9969	894 109 9690	65-75	143-165	2,000	6.5	14.5	32.0



- Equilibradores para cargas pesadas 75 a 105 kg
- Cable de acero inoxidable
- Carcasa de aluminio
- Carrera de cable 2,000 mm

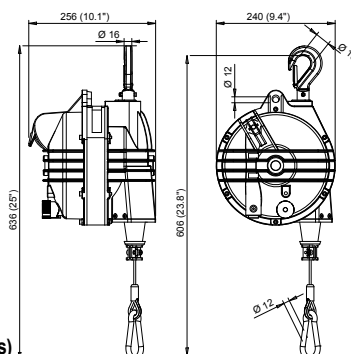

MODELO	REFERENCIA	CAPACIDAD DE CARGA		RECORRIDO DEL CABLE		PESO	
		kg	lb.	mm	ft	kg	lb.
CP9970	894 109 9700	75-90	165-198	2,000	6.5	17.3	38.1
CP9971	894 109 9710	90-105	198-231	2,000	6.5	18.0	39.7