


TL300-600 SPUR GEAR HAND WINCH



**RED ROOSTER
LIFTING**

RAISING EXPECTATIONS

The TL series from gebuwin is a range of high speed hand winches that are easy to use. These are just part of Red Rooster Lifting's full range of Gebuwin equipment available.



This convenient spur gear hand operated winch from Gebuwin excels because of its high speed. It is equipped with a load-pressure brake with a double ratchet system and a semi-closed housing.

STANDARD FEATURES

- Robust, safe lifting and pulling winch in compliance with EN13157
- Static safety factor 4
- High efficiency due to spur gear transmission
- Maintenance free bearings
- Load pressure brake with double ratchet system
- Cable outlet upwards
- Adjustable crank, with ergonomic grip
- Suitable for wall mounting
- Simple and quick attachment
- Corrosion resistant
- Paint system for C1M

AVAILABLE OPTIONS

- Zinc-plated finish 6-8 micron (EV)
- Paint system for C3M (2L)
- ATEX certified zone 2 and 22 (EX)
 - CE II 3G Ex IIC T4 Gc, -20°C<T amb <+70°C
 - CE II 3D Ex IIIC T135°C Dc, -20°C<T amb <+70°C
- Custom options possible - on request

ACCESSORIES

- Steel or stainless steel wire rope
- Pulley block

T: +44 (0) 1651 872101
sales@redroosterlifting.com

REDROOSTERLIFTING.COM

GEBUWIN
quality winches

Red Rooster Lifting Limited Nauta House, The Meadows, Oldmeldrum, Inverurie, Aberdeenshire, UK, AB51 0EZ

TL300-600 SPUR GEAR HAND WINCH




**RED ROOSTER
LIFTING**

RAISING EXPECTATIONS

DIMENSIONS

All measurements are in mm
Information subject to change without notice

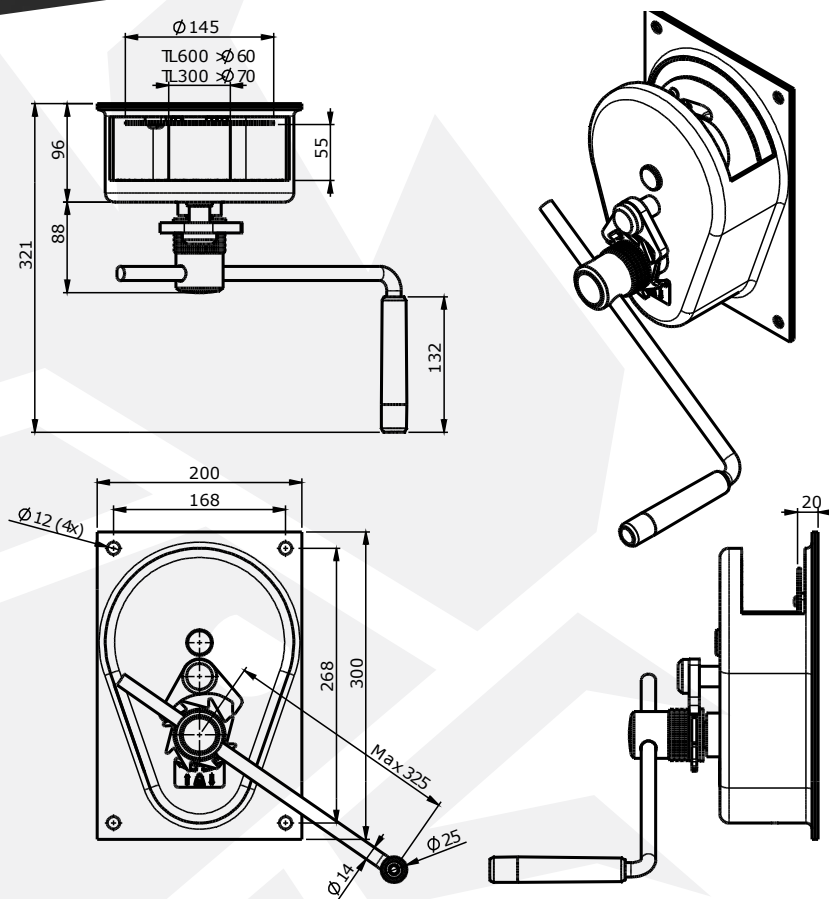

MODEL	TL300	TL600
CAPACITY 1st LAYER KG	300	600
CAPACITY 4th LAYER KG	234	408
CAPACITY TOP LAYER KG	172	336
ROPE DIA Ø MM	4	6
ROPE STORAGE 1st LAYER M	2.3	1
ROPE STORAGE 4th LAYER M	12.5	7
ROPE STORAGE TOP LAYER M	35.4	12.3
LIFT PER CRANK ROTATION MM	32	28
CRANK EFFORT AT FULL LOAD daN	5.5	10
WEIGHT (WITHOUT ROPE) KG	10	11

T: +44 (0) 1651 872101
sales@redroosterlifting.com

GEBUWIN
quality winches