



**RED ROOSTER
LIFTING**

RAISING EXPECTATIONS

WW250-1500 WORM GEAR HAND WINCH

The **WW** series from Gebuwin is a range of lifting and pulling worm gear hand winches that are easy to use and versatile. These are just part of Red Rooster Lifting's full range of Gebuwin equipment available.



The WW range of hand winches from Gebuwin is incredibly safe due to the natural braking effect of the worm gear transmission in combination with the load pressure brake. In addition, the winch is easy to use, can be mounted in various ways and has cable storage of up to 120 metres.

STANDARD FEATURES

- Robust, safe lifting and pulling winch in compliance with EN13157
- Static safety factor 4
- Right angled, easy to grease worm transmission
- Maintenance free bearings
- Load pressure brake with double ratchet system
- Cable outlet upwards, downwards or at rear
- Adjustable crank, with ergonomic grip
- Suitable for wall and floor mounting
- Large rope capacity
- Simple and quick attachment
- Corrosion resistant
- Paint system for C1M

AVAILABLE OPTIONS

- Zinc-plated finish 6-8 micron (EV)
- Paint system for C3M (2L)
- Grooved drum (GD)
- 2 drum compartment (2D)
- Suitable to use with webbing belt W: 50 mm D: 2 mm (WB)
 - Belt storage WW250: 10 m
 - Belt storage WW500: 14 m
 - Belt storage WW1000-1250: 15 m
- Suitable for floor mounting (FM)
- ATEX certified zone 2 and 22 (EX)
 - CE II 3G Ex IIC T4 Gc, -20°C < T amb < +70°C
 - CE II 3D Ex IIIC T135°C Dc, -20°C < T amb < +70°C
- Custom options possible - on request

ACCESSORIES

- Steel or stainless steel wire rope
- Pulley block
- Electric or air motor as from WW1000



T: +44 (0) 1651 872101
sales@redroosterlifting.com

REDROOSTERLIFTING.COM

GEBUWIN
quality winches

Red Rooster Lifting Limited Nauta House, The Meadows, Oldmeldrum, Inverurie, Aberdeenshire, UK, AB51 0EZ








**RED ROOSTER
LIFTING**

RAISING EXPECTATIONS

WW250-1500 WORM GEAR HAND WINCH

DIMENSIONS

All measurements are in mm
Information subject to change without notice

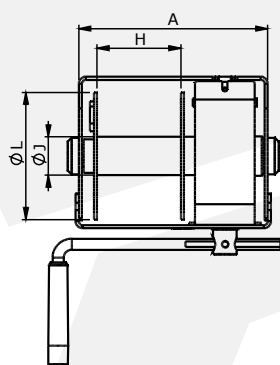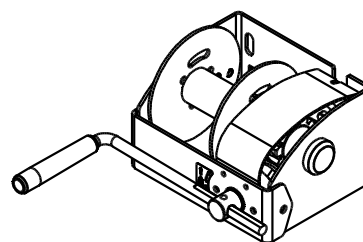

MODEL	A	B	C	D	G	H	J	K	L	M	N	O	P	R	S
WW250	238	145	100	192	107	105	48	14	160	191	15	365	325	171	132
WW500	269	160	115	223	108	135	70	14	190	221	15	393	325	193	132
WW1000	302	195	141	254	109	162	102	17	240	266	15	440	350	263	132
WW1500	302	250	178	254	109	162	102	17	240	278	15	451	350	306	132

MODEL	WW250	WW500	WW1000	WW1500
CAPACITY 1st LAYER KG	250	500	1000	1500
CAPACITY 4th LAYER KG	179	355	772	1025
CAPACITY TOP LAYER KG	92	224	527	846
ROPE DIA Ø MM	4	6	8	10
ROPE STORAGE 1st LAYER M	3.6	4.3	4.7	4.2
ROPE STORAGE 4th LAYER M	18.7	22.8	25.6	24
ROPE STORAGE TOP LAYER M	104	78	63	41
LIFT PER CRANK ROTATION MM	17	20	13	9
CRANK EFFORT AT FULL LOAD daN	5	10	13	14
WEIGHT (WITHOUT ROPE) KG	10	13	22	24

T: +44 (0) 1651 872101
sales@redroosterlifting.com

GEBUWIN
quality winches

REDROOSTERLIFTING.COM

Red Rooster Lifting Limited Nauta House, The Meadows, Oldmeldrum, Inverurie, Aberdeenshire, UK, AB51 0EZ