

TL1000-1500 SPUR GEAR HAND WINCH



**RED ROOSTER
LIFTING**

RAISING EXPECTATIONS

The TL series from Gebuwin is a range of high speed hand winches that are easy to use. These are just part of Red Rooster Lifting's full range of Gebuwin equipment available.



This spur gear hand operated winch from Gebuwin is fast, easy to use and can be mounted on both walls and floors. It also has an optional free-spooling device for pulling applications. In addition to water resistance, this winch is also available in stainless steel 304.

STANDARD FEATURES


- Robust, safe lifting and pulling winch in compliance with EN13157
- Static safety factor 4
- High efficiency due to spur gear transmission
- Protection classification IP54
- Maintenance free bearings
- Load pressure brake with double ratchet system
- Cable outlet upwards, downwards or at the left
- Closed gearbox to protect against environment
- Adjustable crank, with ergonomic grip
- Suitable for wall and floor mounting
- Simple and quick attachment
- Corrosion resistant
- Paint system for C1M

AVAILABLE OPTIONS

- Zinc-plated finish 6-8 micron (EV)
- Paint system for C3M (2L)
- Stainless steel grade 304 (SST304)
- 2 drum compartment (2D) or multiple up to 8 (XD)
- Free-spooling device for pulling applications (FS)
- ATEX certified zone 2 and 22 (EX)
 - CE II 3G Ex IIC T4 Gc, -20°C < T amb < +70°C
 - CE II 3D Ex IIIC T135°C Dc, -20°C < T amb < +70°C
- Custom options possible - on request

ACCESSORIES

- Steel or stainless steel wire rope
- Pulley block



T: +44 (0) 1651 872101
sales@redroosterlifting.com

REDROOSTERLIFTING.COM

GEBUWIN
quality winches

Red Rooster Lifting Limited Nauta House, The Meadows, Oldmeldrum, Inverurie, Aberdeenshire, UK, AB51 0EZ

TL1000-1500 SPUR GEAR HAND WINCH








**RED ROOSTER
LIFTING**

RAISING EXPECTATIONS

DIMENSIONS

All measurements are in mm
Information subject to change without notice

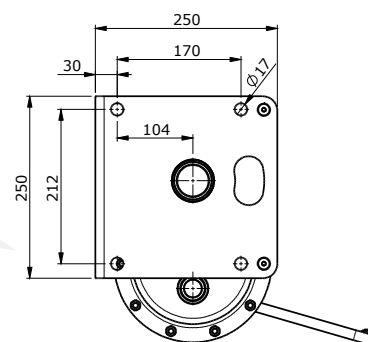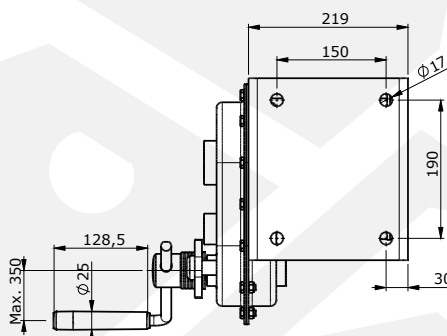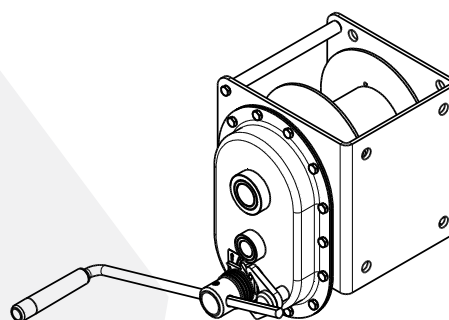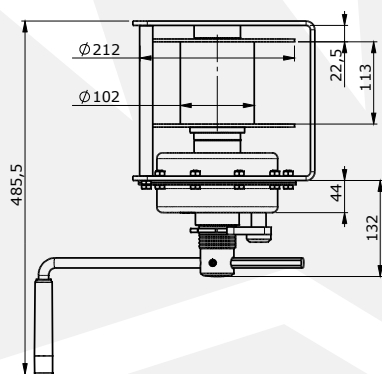

MODEL	TL1000	TL1500
CAPACITY 1st LAYER KG	1000	1500
CAPACITY 4th LAYER KG	726	1025
CAPACITY TOP LAYER KG	614	927
ROPE DIA Ø MM	8	10
ROPE STORAGE 1st LAYER M	3.5	2.5
ROPE STORAGE 4th LAYER M	19.5	15.4
ROPE STORAGE TOP LAYER M	33	21
LIFT PER CRANK ROTATION MM	20	14
CRANK EFFORT AT FULL LOAD daN	11	12
WEIGHT (WITHOUT ROPE) KG	27	27.5

T: +44 (0) 1651 872101
sales@redroosterlifting.com

GEBUWIN
quality winches

REDROOSTERLIFTING.COM

Red Rooster Lifting Limited Nauta House, The Meadows, Oldmeldrum, Inverurie, Aberdeenshire, UK, AB51 0EZ