



**RED ROOSTER
LIFTING**

RAISING EXPECTATIONS

DW1000 BATTERY DRILL WINCH

The **DW** winch from Gebuwin is a worm gear winch that can be operated both manually and with a cordless drill. This is just part of Red Rooster Lifting's full range of Gebuwin equipment available.

The worm gear winch can be operated both manually and with a cordless drill. A user-friendly winch and often used as a back-up system. If there is a power failure and you want to move a heavy load quickly and effectively, the use of a battery-powered drill offers a solution. The winch is equipped with automatic grease lubrication and a special flexible adaptor to absorb the vibrations of the drilling machine and keep the winch in good condition.

STANDARD FEATURES

- Winch suitable for lifting and pulling in compliance with EN13157
- Static safety factor 4
- Load pressure brake with double ratchet system for safe stable hold of the load in any position
- Cable outlet upwards, downwards or at rear
- Protection classification IP54
- Automatic grease system for the worm gearing
- Adjustable crank
- Drill and hand operated
- Suitable for wall and (optional) floor mounting
- 1 layer of paint

AVAILABLE OPTIONS

- Zinc-plated finish 6 - 8 micron (EV)
- 2 layers of paint (2L)
- Grooved drum (GD)
- 2 drum compartment (2D) or multiple up to 8 (XD)
- Suitable for floor mounting (FM)
- Custom options possible - on request

ACCESSORIES

- Steel, stainless steel or fiber rope
- Pulley block



T: +44 (0) 1651 872101
sales@redroosterlifting.com

REDROOSTERLIFTING.COM

GEBUWIN
quality winches

Red Rooster Lifting Limited Nauta House, The Meadows, Oldmeldrum, Inverurie, Aberdeenshire, UK, AB51 0EZ

DW1000

BATTERY DRILL WINCH








RED ROOSTER
LIFTING

RAISING EXPECTATIONS

DIMENSIONS

All measurements are in mm
Information subject to change without notice

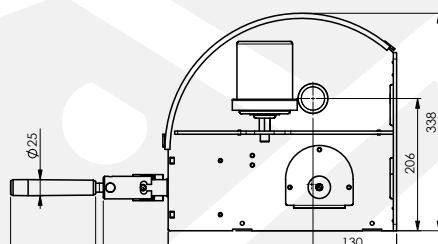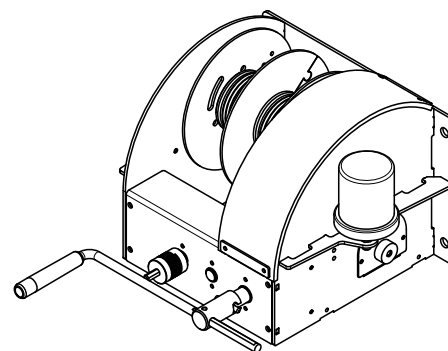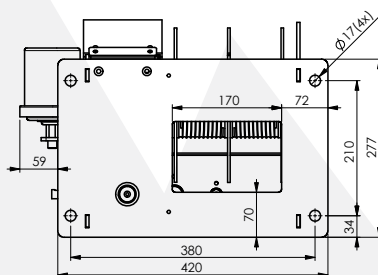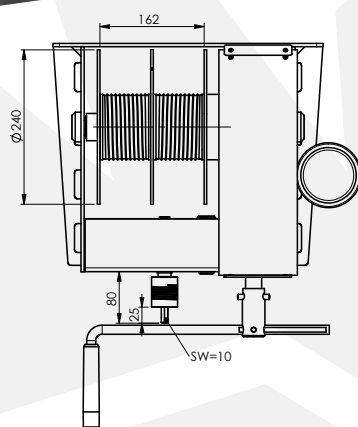

MODEL	DW1000
CAPACITY 1st LAYER KG	1000
CAPACITY 4th LAYER KG	725
CAPACITY TOP LAYER KG	527
ROPE DIA Ø MM	8
MBL OF CABLE kN	30
ROPE STORAGE 1st LAYER M	5.5
ROPE STORAGE 4th LAYER M	29.2
ROPE STORAGE TOP LAYER M	73
LIFTING SPEED M/MIN	0.5
CRANK EFFORT AT FULL LOAD daN	11
TORQUE INGOING SHAFT Nm	6
MAX INPUT ROTATION SPEED DRILL RPM	650
WEIGHT (WITHOUT ROPE) KG	39

T: +44 (0) 1651 872101
sales@redroosterlifting.com

REDROOSTERLIFTING.COM

GEBUWIN
quality winches

Red Rooster Lifting Limited Nauta House, The Meadows, Oldmeldrum, Inverurie, Aberdeenshire, UK, AB51 0EZ