


TMH-3000-LHR LOW HEADROOM AIR HOIST

The **TMH-3000-LHR** is a 3 tonne low headroom chain hoist and trolley from Red Rooster Lifting. This is part of our air hoist and trolley range for lifting equipment applications in industry.



**RED ROOSTER
LIFTING**

RAISING EXPECTATIONS

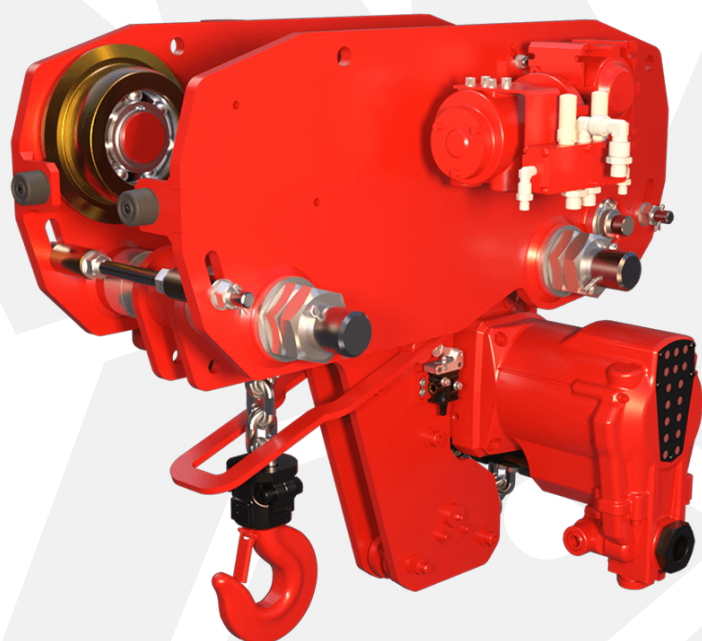

The new **Red Rooster Lifting** TMH series air hoist and trolleys have the highest lifting speed with the lowest headroom on the hoist market. With the high M4 classification of mechanism (ISO 4301-1) this high speed air hoist is extremely durable and will guarantee the continuity of your process. The TMH hoists are designed to operate at full lifting capacity with an air pressure from 4 – 6.3 bar. For full speed operation the hoist air pressure should be 6.3 bar.

STANDARD FEATURES

- Toku rotary vane motor
- Robust 3 step planetary gearbox
- Failsafe automatic internal disc brake
- Upper & lower limit switches
- Cast steel housing
- Internal silencing down to 80 dB(A)
- Alloy safety swivel hooks with safety catch
- Load chain of European manufacture EN818-7
- Automatic load limiter

AVAILABLE OPTIONS

- Marine specification
- Collision bumpers
- ATEX zone 1 specification
- Articulated trolleys
- Rack & pinion drive
- Travel limits
- Air Service units
- Festoon systems
- Radio control remote
- Main air shut off valve
- Special paint systems
- Beam brake
- Other travel speeds



**ATEX ZONE 2
AS STANDARD**

T: +44 (0) 1651 872101
sales@redroosterlifting.com

REDROOSTERLIFTING.COM

Red Rooster Lifting Limited Nauta House, The Meadows, Oldmeldrum, Inverurie, Aberdeenshire, UK, AB51 0EZ

TMH-3000-LHR

LOW HEADROOM AIR HOIST



RED ROOSTER
LIFTING



RAISING EXPECTATIONS

DIMENSIONS

All measurements are in mm
Information subject to change without notice

MODEL	TMH-3000-LHR
WLL	3000 kg
CHAIN FALLS	1
LIFTING SPEED FULL LOAD	5.4 m/min
LIFTING SPEED WITHOUT FULL LOAD	10.8 m/min
LOWERING SPEED FULL LOAD	10.2 m/min
TRAVEL SPEED	6.0 m/min
HOIST AIR CONSUMPTION	56 l/sec
TROLLEY AIR CONSUMPTION	25 l/sec
INLET CONNECTION	1" BSP
WEIGHT WITH 3M HOL	380 kg
ADDITIONAL METRE HOL	3.8 kg
FLANGE MINIMUM	110 mm
FLANGE MAXIMUM	300 mm
G.A. DRAWING	RRL 1572-00

AT_S = STANDARD AT_ATX = ATEX

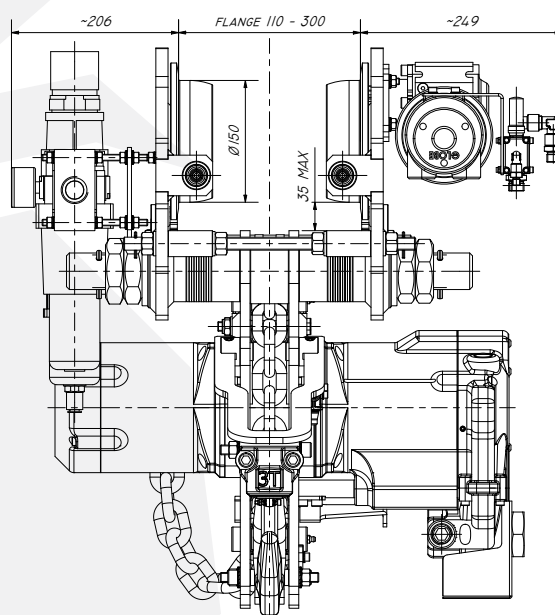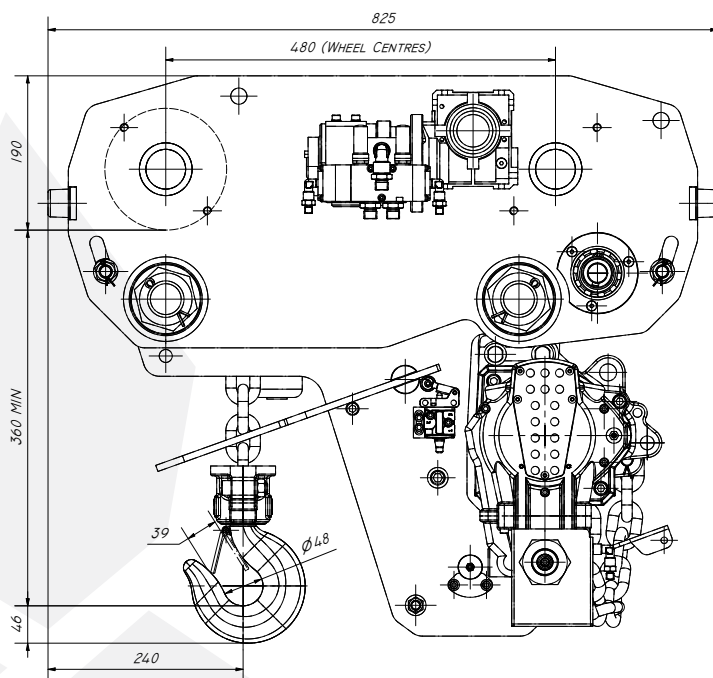

T: +44 (0) 1651 872101
sales@redroosterlifting.com

REDROOSTERLIFTING.COM

Red Rooster Lifting Limited Nauta House, The Meadows, Oldmeldrum, Inverurie, Aberdeenshire, UK, AB51 0EZ