

MC AK WINCH SERIES ELECTRIC WORMGEAR WINCH



**RED ROOSTER
LIFTING**

RAISING EXPECTATIONS

The **MC AK** series are two electric self-braking wormgear winches specifically developed for car lifting purposes. This model is just part of Red Rooster's full range of EMCE winches available.

STANDARD FEATURES

- Self-braking worm gear transmission
- IP 56 TENV cast iron non-braked motor
400 V AC / 3 phases / 50 Hz.
- Steel drum (not grooved) with cable fixing point at flange
- Two drum supports
- Double layer 2-component conservation according
- ISO 12944 category C2-Low, colour RAL 5010
- FEM / ISO class T2-L2-M2



AVAILABLE OPTIONS

- Braked motor
- Alternative speeds
- Marine / offshore coating systems

AVAILABLE CONTROL OPTIONS

- IP 55 Control box with push-buttons and emergency stop built acc. to NEN 1010
- IP 55 Control box with low-voltage IP 65 remote control built acc. to NEN 1010
- Load limiter
- Frequency inverter for variable speed control
- Limit switches

AK17

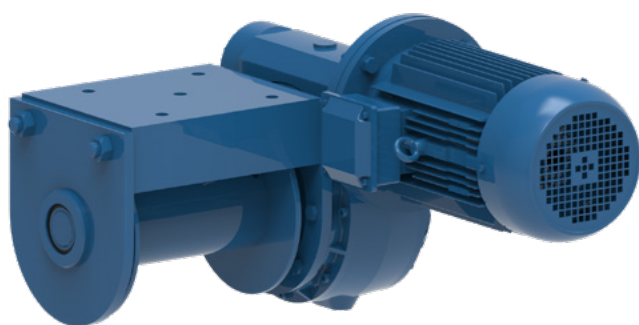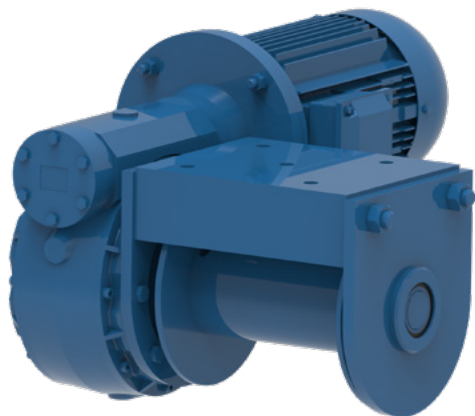

T: +44 (0) 1651 872101
sales@redroosterlifting.com

REDROOSTERLIFTING.COM

EMCÉ
WINCHES

Red Rooster Lifting Limited Nauta House, The Meadows, Oldmeldrum, Inverurie, Aberdeenshire, UK, AB51 0EZ

MC AK WINCH SERIES

ELECTRIC WORMGEAR WINCH





RED ROOSTER
LIFTING

RAISING EXPECTATIONS

TECHNICAL INFORMATION

All measurements are in mm
Information subject to change without notice

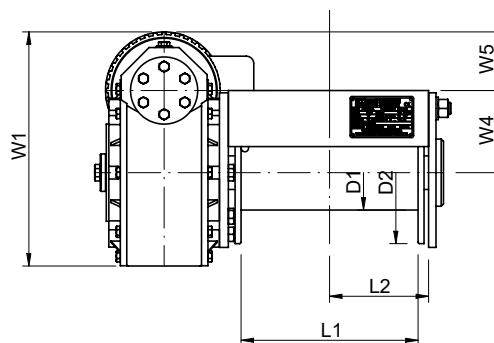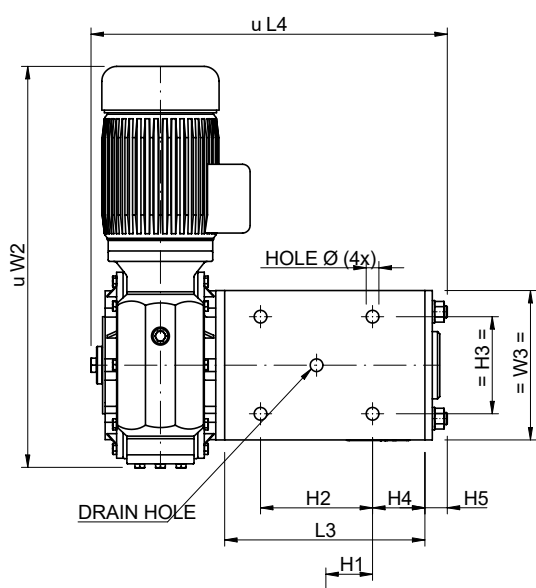

MODEL	MASS KG	D1	D2	L1	L2	L3	L4	H1	H2	H3	H4	H5	W1	W2	W3	W4	W5	HOLE Ø
MC 1200 AK	92	100	190	237	132.5	268	477	62.5	150	130	70	30	313.5	537	200	110	78.5	17
MC 1700 AK	140	121	240	240	134	291	540	59	170	160	75	30	400	638	240	150	105	17

MODEL	WLL 1ST LAYER KG	WLL 4TH LAYER KG	RECOMMENDED ROPE DIA MM	SPEED 1ST LAYER M/MIN	DRUMCAP 1ST LAYER M	DRUMCAP 4TH LAYER M	MOTOR POWER 400 V KW	WEIGHT WITHOUT ROPE KG
MC 1200 AK	960	665	8	5	9	45	1.5	92
MC 1700 AK	1300	890	10	6	8	45	3	140

EMCÉ
WINCHES