

MR500-5000 SST STAINLESS STEEL 316 WORM GEAR HAND WINCH



**RED ROOSTER
LIFTING**

RAISING EXPECTATIONS

The **MR SST** series from Gebuwin is a range of lifting and pulling worm gear hand winches that are made from stainless steel 316. These are just part of Red Rooster Lifting's full range of Gebuwin equipment available.



The MR SST range of hand winches from Gebuwin are corrosion resistant and completely made of stainless steel 316. The hand winch is IP54 classified which means it is resistant to splash water and dust on the inside. In short - A winch for the toughest conditions!

STANDARD FEATURES

- Robust, safe lifting and pulling winch in compliance with EN13157
- Static safety factor 4
- Two lifting speeds
- Right angled, easy to grease worm transmission
- Maintenance free bearings
- Load pressure brake with double ratchet system
- Closed gearbox for protection against environment IP54
- Cable outlet upwards, downwards or at rear
- Adjustable crank, with ergonomic grip
- Suitable for wall and floor mounting
- Large rope capacity
- Simple and quick attachment
- Corrosion resistant
- Full stainless steel 316 body, drum, crank & external parts

AVAILABLE OPTIONS

- Grooved drum (GD)
- 2 drum compartment (2D) or multiple up to 8 (XD)
- Suitable for floor mounting (FM)
- ATEX certified zone 2 and 22 (EX)
 - CE II 3G Ex IIC T4 Gc, -20°C < T amb < +70°C
 - CE II 3D Ex IIC T135°C Dc, -20°C < T amb < +70°C
- Custom options possible - on request

ACCESSORIES

- Steel or stainless steel wire rope
- Pulley block
- Electric or air motor as from WW1000

T: +44 (0) 1651 872101
sales@redroosterlifting.com

REDROOSTERLIFTING.COM

GEBUWIN
quality winches

Red Rooster Lifting Limited Nauta House, The Meadows, Oldmeldrum, Inverurie, Aberdeenshire, UK, AB51 0EZ

MR500-5000 SST

STAINLESS STEEL 316

WORM GEAR HAND WINCH




RED ROOSTER
LIFTING

RAISING EXPECTATIONS


DIMENSIONS

All measurements are in mm
Information subject to change without notice

MR500-1500 SST

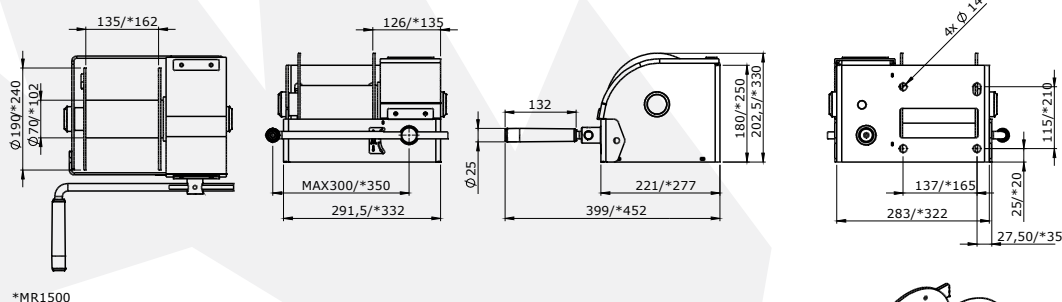

MR3000-5000 SST

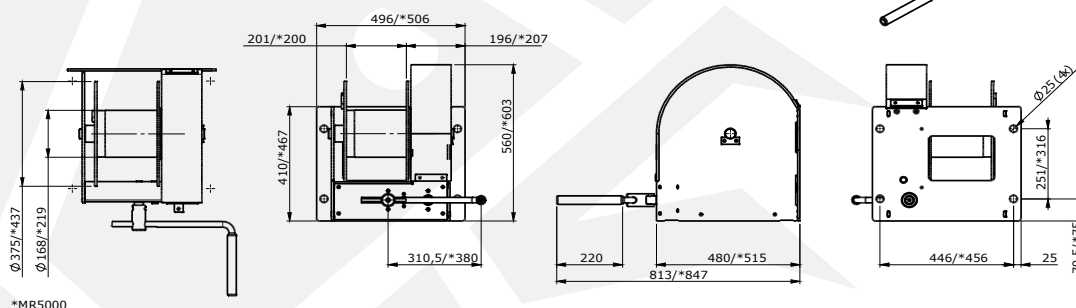

MODEL	MR500 SST	MR1500 SST	MR3000 SST	MR5000 SST
CAPACITY 1st LAYER KG	500	1500	3000	5000
CAPACITY 4th LAYER KG	326	970	2066	3485
CAPACITY TOP LAYER KG	242	867	1711	3165
ROPE DIA Ø MM	8	12	16	20
ROPE STORAGE 1st LAYER M	3.2	3.2	5.2	4.5
ROPE STORAGE 4th LAYER M	18.5	19.8	30.8	28.7
ROPE STORAGE TOP LAYER M	40.2	27.3	41.9	39.4
LIFT PER CRANK ROTATION MM	20	9	11 (5)	13 (3)
CRANK EFFORT AT FULL LOAD daN	10	14	31 (14)	73 (15)
WEIGHT (WITHOUT ROPE) KG	16	30	104	135

T: +44 (0) 1651 872101
sales@redroosterlifting.com

REDROOSTERLIFTING.COM

GEBUWIN
quality winches

Red Rooster Lifting Limited Nauta House, The Meadows, Oldmeldrum, Inverurie, Aberdeenshire, UK, AB51 0EZ